특허등록 PL 보상가입1억 안전마크 획득 CCM획득

GALAXY®
PREMIUM JUICER SINCE 1990
Galaxy Premium Juicer

Instruction Manual

GALAXY®
www.galaxykorea.com

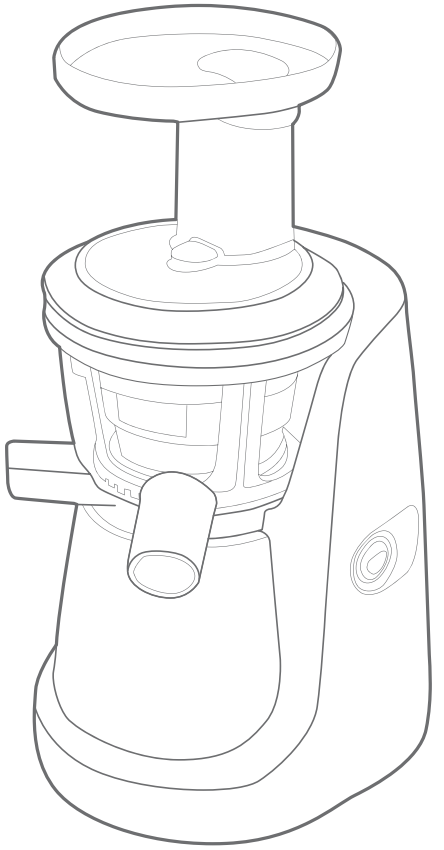

J.M.C.S
Juicer Module Comprising System
독자적
최신 특허 신기술

M3.90, J80, E121009

This is a universal user's manual, and the color of the product can vary depends on each model.
The color and specification of a product can be changed without any prior notice to improve the quality of the product.

NUC
(주)엔유씨전자
Customer Service | 1577-5057

Name of Each part

※ Depending on the product model, the actual product's color may be different.

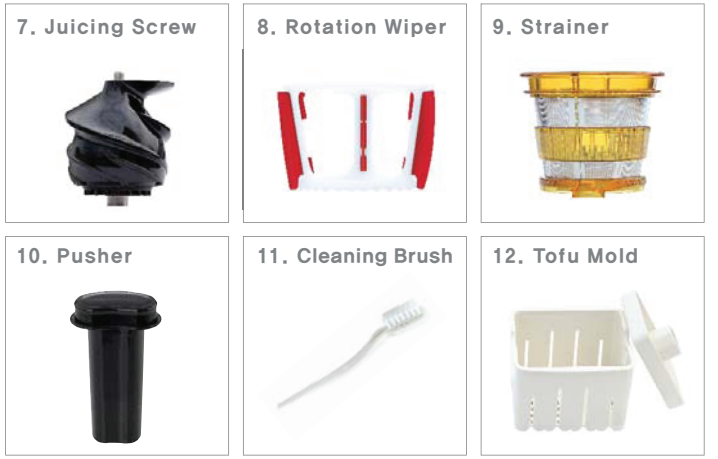

STEP 1

How to assemble Juicing Bowl Set

Align the red ● on each part and put them together in order. Align the red ● on the drum lid and close it by turning clockwise.

STEP 2

How to assemble Juicing bowl set and Base

After raising the juicing bowl set on the base, align the black upside ▼point in the drum lid with the △point in the base and turn it in the direction of ▲(close) direction.

Detailed Assembly Method

※ Depending on the product model, the actual product's color may be different.

STEP 1 / Assembly Method for Juicing Bowl Set

Before the usage, please check!

- Use the set after sufficiently washing the juicing bowl set.
- Check that squeeze silicon and silicon ring are correctly plugged.

1 Fully fit the squeeze silicon to the bottom of the container in the direction of arrow as shown in the photo.

Caution If the squeezed silicon and the silicon ring is not completely fitted in, the juice amount may be little or the juice may seep out.

2 Fit the rotation wiper to the strainer and align the ● point in the strainer and rotation wiper to assemble.

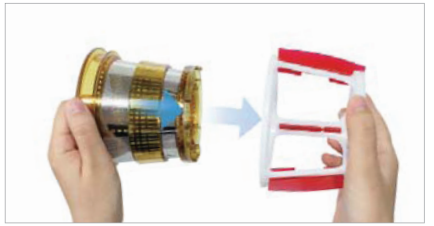

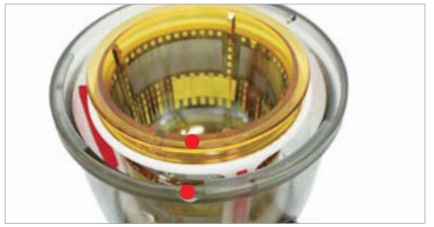

3 Turn the screw in the center of strainer and gently press it down.

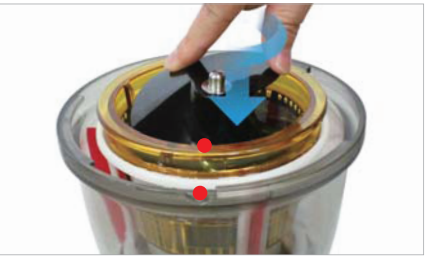

Caution If the screw is not fully tightened, bowl and drum cannot be tightened.

4 Align each of ● points in the juicing bowl set and drum lid, and turn it in clockwise direction to align at ▮▮ point to close it.

STEP 2 / Assembly Method for Juicing Bowl Set and Base

5 After raising the juicing bowl set on the base, ▼ point in the drum lid with △ point in the base and turn it in the direction of ▲ (close) direction

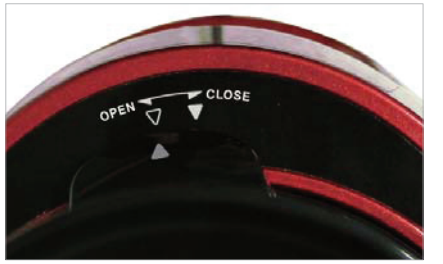

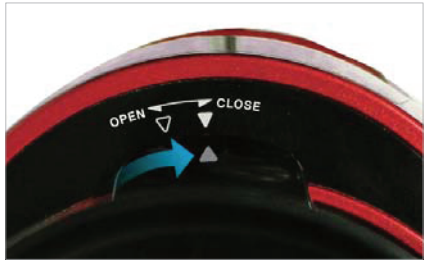

Caution When assembling the juicing bowl set to the base, securely turn it until a clicking sound is made. If it is not tightened properly, it does not operate.

6 Match the pulp cup and juice up at the outlet as shown in the photo.

Silicon Ring/Silicon Brush

After separating it for washing, it must be put back in the direction shown in the photo for use.

→ Put the wide surface to the top to use.

→ Aim the tail side to the bottom to use.

After getting the prepared ingredients ready, plug the power plug into the outlet and then turn on the power.

Caution
- Do not operate the power plug with wet hands.
  (This can be the cause of electric shock, electric leakage, or fire.)
- Check that the condition of the outlet is proper.

Press the "FORWARD" of operation switch to begin its operation.

Caution
- Forward: Press the ingredients down to do low-speed squeeze extraction
- Reverse: Turn the ingredients in reverse direction to the top.

* If the screw stops or opening the lid is difficult due to inserting too much ingredients, press reverse ↔ stop ↔ forward for about 2~3 times repeatedly.

If the product suddenly stops during operation

If the product suddenly stops during operation, then set the switch to "stop," press the "reverse" to push up the ingredients that are stuck in the screws, and then press the "forward" again.

▶ reverse ↔ stop ↔ forward for about 2~3 times repeatedly

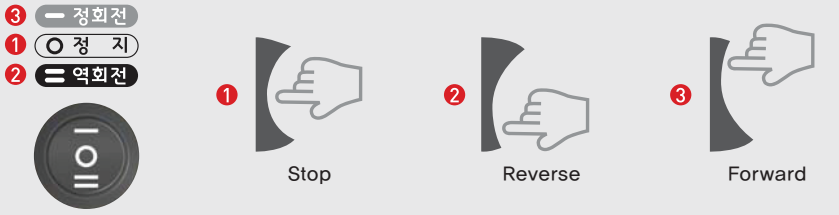

- Reverse: Turn the ingredients in reverse direction to the top.
  (reverse switch only operates while it is pressed).
- While the "forward" rotation is going on, first press the "stop" switch to fully stop the operation and then press the "reverse" switch.
  (Pressing the "reverse" switch while the "forward" rotation is going on may be the cause of malfunctioning.)
- If the product is still not working properly, separate the juicing bowl and wash it to use.

Insert cleanly prepared ingredients one by one to the slot.

Caution
- While extracting, prepare the ingredient according to its characteristics.
  - For ingredients with strong fiber:
  - Leafy vegetables (celery, water celery, angelica, kale, and others) and ingredientswith long and strong fiber
    Stem part 3~5cm or under (1cm or under for angelica), and leaf part should be rolled for extraction
  - For fruits with hard seeds, remove the seeds, and even the small sizes of frozen ingredients should be fully thawed before they can be used.

  ※ For more detailed information, please refer to p18~p27.
- When inserting too much ingredients at once, the operation may be stopped, so slowly insert one at a time.

Once the juice and pulp are fully released at the end of extraction, "stop" the operation switch.

Caution
- If the release of residues are not fully finished after the extraction, the lid may not open.
  (After finishing the extraction, release the remaining pulp in the screw for about 30 seconds.)

  If the lid does not open easily at this time, repeatedly press reverse ↔ stop ↔ forward for about 2~3 times, and with the palm of the hand tightly pressed down on the top side of the drum lid, turn it to open.

  ※ Depending on the ingredient, water may be added to the slot to do simple washing, and then turn the lid to open.

Forward : Press the ingredients down to do low-speed squeeze extraction /
Stop : Stop the operation. / **Reverse** : Turn the ingredients in reverse direction to the top.

Disassembling and Cleaning Method

※ Depending on the product model, the actual product's color may be different.

1 After placing the operation switch on "stop", unplug the cord.

Caution
- Stop after all of the juicing bowl set is eliminated of the pulp.
- For convenient washing, after the juicing is completed, run it for about 30 seconds.

Depending on the ingredient, if opening the lid is difficult, repeat 2~3 times of reverse ↔ stop ↔ forward rotation and then firmly press the drum lid's top side with the palm of your hand and open by turning.

※ Depending on the ingredient, insert water into the slot as a quick washing, and then turn the lid.

2 After turning the container lid in counter-clockwise direction, disassemble by pulling up the drum lid.

3 After turning the juicing bowl set in counterclockwise direction, disassemble by pulling up the juicing bowl set.

4 From the container, disassemble the rotation wiper, strainer, and screw. After disassembling each parts in the reverse order of assembling, wash with a soft brush.

Caution
- Please be aware that if you do not immediately wash after usage, debris will dry off and not only make disassemble and cleaning hard, but also becomes the cause of decrease in operation efficiency.
- The juicing bowl set disassembling can be easily disassembled in the sink by letting tap water flow from top to bottom.
- Dry off well so that the inner side of the metal part in the screw shaft does not have any moisture.

5 Clean the main body by wiping it with a soft, lightly moistened cloth.

Caution · If the washing cloth has much moisture, be sure to remove the excessive water by squeezing the towel out well before wiping.

Disassembling and Cleaning Method

※ Depending on the product model, the actual product's color may be different.

TIP | Clean the rotating wiper under running water.

Always use it when it is dried after washing. Before assembling the juicing bowl set, be sure to check if the squeezed silicon and silicon ring is correctly fitted in.

Caution | If the squeezed silicon and the silicon ring are not completely fitted in, the juice amount may be little or the juice may seep out.

Assembling After Washing Silicon Brush

〈Silicon Brush〉

Separate washing is possible.

After washing, point the silicon brush's tail part in the downward direction, and as shown in the picture, place in the middle wide space and fit in the order of down → up and then use.

Assembling After Washing Squeezed Silicon

〈Squeezed Silicon〉

Can be opened and then washed.

After washing as shown in the picture, place it in the direction of the arrow and then use.

Assembling After Washing Silicon Ring

〈Silicon Ring〉

Separate washing is possible.

After washing, fit in the silicon ring in the home accurately by having the wide surface in the upper direction as shown in the picture.

Screw Cleaning Method

※ Depending on the product model, the actual product's color may be different.

TIP | Thoroughly wash the screw with a cleaning brush under running water.

After washing with water, use it after it is dried.
Before assembling the juicing bowl set, be sure to always check if there are any debris on the screw.

Caution | Be sure to thoroughly wash the screw even under the dip in the screw when used with seeded ingredients (rubus coreanus, grape, and etc.). If there are leftover seeds in the screw during juicing, the screw and the strainer may move in irregular motion resulting in sharpening of the screw.

Under running water, thoroughly wash the outside of the screw.

By using the end of the cleaning brush, eliminate debris (seeds, little bits of food) stuck in the home part of the screw.

Option I Rotating Brush Usage Instruction

※ Depending on the product model, the actual product's color may be different.

TIP | Juice net can be more conveniently and easily cleansed by using the rotating brush.

Always use it when it is dried after washing.

Hold and fix the rotating brush with one hand and fit in the strainer.

Caution

Push it in until you hear the clicking sound.

Under running water, wash the cleaning brush and strainer's inside and out alternately.

Alternately rinse the cleaning brush and the inside and outside of juice net with running water.

After washing, disassemble the rotating brush and the juice net.
Store the disassembled product after they are dried.